



faceAXS v3

FACIAL RECOGNITION SYSTEM

FACEAXS, classic version, third generation is one of the most popular embedded facial recognition system of the industry with leading "Dual Sensor" Facial Recognition Algorithm, which makes facial recognition faster and accurate, different source-light within Infrared-light based technology enable the system works well under different environment.

FaceAXS is designed for applications like physical access control and time attendance, identity management and so on. Its classic slope design is good for commercial market like Enterprise, Bank, building automation and so on.

MAIN ADVANTAGES

- Core Technology Algorithm:
 - ▶ Fast Enrollment - 10 seconds to enroll one user
 - ▶ Fast identification - 1 second to identify on 1:N for 1,000 users
 - ▶ Large capacity - 1,000 users / 200,000 records
 - ▶ FAR < 0.001%
 - ▶ Reliable performance under different environment even in the dark



- Stability of hardware
- faceAXS has got Patent for Inclined Image Capture Device and Facial Recognition System
- Contactless enrollment and verification makes the hygienic user experience
- No extra cost to pay for badge or paper card

ADVANCED TECHNOLOGY THE BEST OPTION

FOR TIME AND ATTENDANCE



KEYBOARD
TACTILE



SENSOR
INFRARED
DUAL



READER
CARDS


CONNECTION
ETHERNET



Contactless

High Usability

TRACKABLE

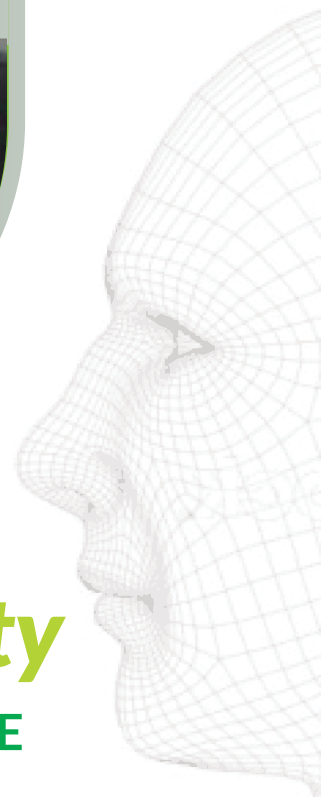

FEATURES



- High speed digital processor keeps processing and matching right on the device
- Standalone application as Time attendance, Access control, User identification



- Industrial Leading "Dual Sensor" Facial Recognition Algorithm, FAR<0.001%, FRR<1%
- 1:Many up to 1,000 users less than 1 second



- 3.5 inch color screen for face positioning
- Contactless authentication for the ultimate in hygienic
- Voice prompt



- Different source-light Technology
- The system can work in different light condition even in the dark



- Easy to install
- Desktop or Wall mounting



- 1,000 face users
- Up to 200,000 logs






- Standard TCP/IP and USB host
- Built in relay
- Wiegand output makes system compatible with different access control panel



- System can work with Face, ID+PIN, Card+Face, Card or Face, Card

CONFIGURACIÓN

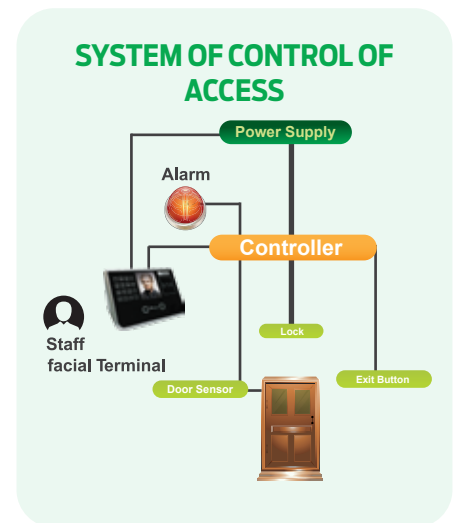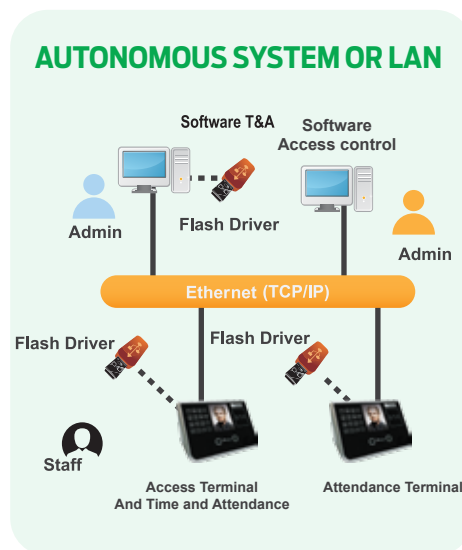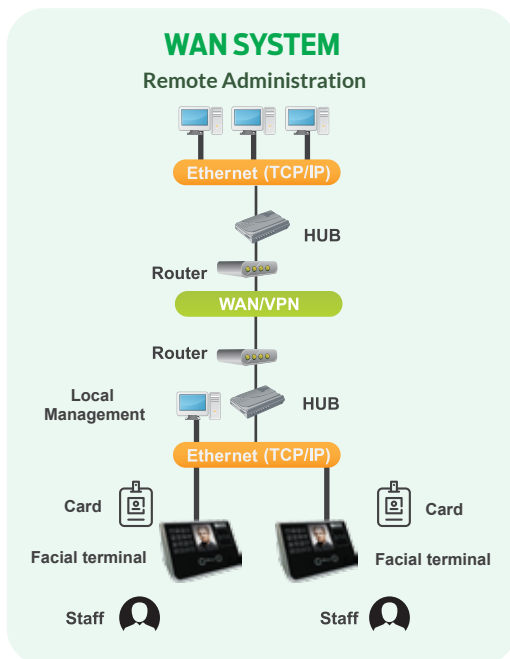

**It is not recommendable to install the device in places with direct light from de sun u other type of light source.

ESPECIFICACIONES

PROCESSOR	High speed digital processor 1 Ghz
USER CAPACITY	1,000 Face Users
RECORD CAPACITY	200,000 Records
ILLUMINATING	10,000 Lux
SENSOR	Specialized IR Sensor
VERIFICATION METHOD	Face, ID + PIN, Card, Card+Face, Card or Face
VERIFICATION SPEED	Less than 1 Second
KEYBOARD	4*4 Touch Keypad
RFID	125 kHz EM
SCREEN	TFT 3.5 Color
COMMUNICATION METHOD	Standard TCP/IP, USB Host, Wiegand output
RELAY	Yes
POWER	12V DC (adaptor included)
OPERATING DISTANCE	30 - 80 cm
OPERATING TEMPERATURE	0°C - 40°C
OPERATING HUMIDITY	20% - 80%
SIZE (W X H X D)	200*95*115 mm
CERTIFICATION	CE, FCC Class A, RoHS

ABOUT EASYWAY BIOMETRICS

EasyWay Biometrics is the new brand of innovative fingerprint solutions for Time & Attendance and Access Control needs. Every EasyWay terminal has been designed with international quality standards, combining fashionable design with outstanding performance.

EasyWay uses the latest technology to create products that provide a functional solution for customers who need low cost T&A and Access Control solutions.



**FACIAL RECOGNITION
SYSTEM**

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE | 170308